


偏心钻具三件套

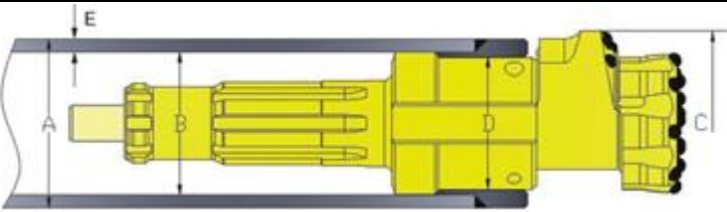

						
	A	E	C	D		F
System No.	根管外径	管靴厚度	扩孔尺寸	管靴内孔最小直径	所配冲击器	所配钻杆
KE85	108mm (4.25")	9 -15 mm (0.35") –(0.59")	118 mm (4.65")	86 mm (3.4")	DHD3.5, COP32, COP34	76 mm (3")
KE90	114 mm (4.5")	11 – 13mm (0.43") –(0.51")	127 mm (5")	91 mm (3.6")	DHD 3.5, COP32 COP34	76 mm (3")
KE102	127 mm (5")	11 mm – 13 mm (0.43") – (0.51")	136 mm (5.35")	101 mm (3.97")	DHD 3.5, COP32 COP34	76 mm (3")
KE115	140 mm (5.5")	13 mm – 16 mm (0.51") – (0.63")	152 mm (5.98")	117 mm (4.6")	DHD340, QL 40 SD-4	76mm (3")
KE115A	146 mm (5.75")	14 mm - 19 mm (0.55")- (0.75")	154 mm (6")	117 mm (4.6")	DHD340, QL 40, SD-4 COP 42/44	76 mm (3")
KE140	168 mm (6.6")	13 mm – 19 mm (0.51") – (0.75")	184 mm (7.25")	140 mm (5.5")	DHD350, QL50 / SD-5 COP52/54	76 mm- 89mm (3") – (3.5")
KE150	178 mm (7")	13 mm – 19 mm (0.51") – (0.75")	194 mm (7.63")	150 mm (5.90")	DHD350, QL50 / SD-5	76 mm – 89 mm (3") – (3.5")
KE165	193 mm (7.6")	13 mm – 20 mm (0.51") –(0.78")	206 mm (8.11")	165 mm (6.5")	DHD360, QL60 / SD-6	89 mm –114mm (3.5") – (4.5")
KE190	219 mm (16.5")	13mm – 20mm (0.51") – (0.78")	234 mm (9.21")	193 mm (7.6")	DHD360 QL60, SD-6	89 mm –114mm (3.5") – (4.5")
KE210	245 mm (9.64")	14 mm -21 mm (0.55") –)0.85")	260 mm (10.25")	210 mm (8.25")	DHD360/380, QL 60/80 SD-6/SD-8	114 mm (4.5")
KE240	273 mm (10.75")	16 mm – 22 mm (0.63") – (0.83")	300 mm (11.8")	240 mm (9.5")	DHD380, QL80 SD-8	114mm-127mm (4.5") – (5")